

COMPACT

ISOblow-familiens vidunder fungerer med 1-faset lysstrøm. Et særlig udviklet hakkeværk, 2 kraftige blæsere, en 5-kammers-luse i en gennemtænkt konstruktion resulterer i en universelt anvendelig indblæsningsmaskine. Fiberisolering som cellulose, glas- og stenuld kan forarbejdes lige så let som løsfyld- og flydende isoleringsmaterialer til kerneisoleringen.

Effekt-vidunderet i "ISOblow familien" med lysstrøm. Et specielt udviklet hakslermaskin, to effektive vifter, en 5-kammer-sluse i en gennomtænkt konstruktion gir en innblåsningsmaskin som kan brukes universalt. Fiber-isolasjonsmateriale som cellulose, glass- og steinull kan bearbejdes like godt som løst og rislende isolasjonsmateriale for kjerneisolering..

The 'ISOblow family' wonder using single-phase current. A specially designed shredding system, two high-performance blowers, a 5-chamber air-lock and a well-thought-out construction result in an all-purpose blowing-machine. Fibre insulation such as cellulose, glass wool and rock wool can be handled just as easily as loose and free-flowing insulation materials for core insulation.



Art.Nr.: 610001

Luftydelsen kan øges ved at tilslutte en forsterkerstation

Ved å forbinde en forsterkerstasjon kan lufteeffekten økes


Air flow can be increased by connection to a booster station




Opsugning i kombination med en ISOCELL-opsugningsbeholder

Oppsugning i kombinasjon med en ISOCELL sugebeholder


Vacuum suction in combination with an ISOCELL suction bin

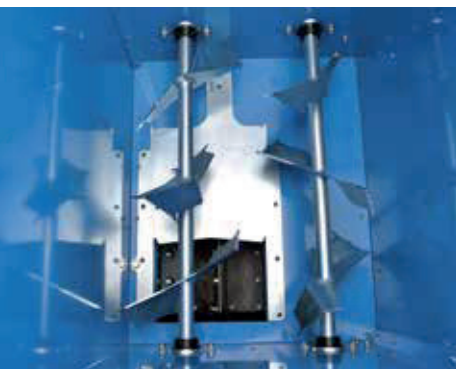


ISOBLOW COMPACT

 95 x 65 x 153 cm


 160 kg

 330 l = 2 pose/pakke ISOCELL

 1 x 0,75 kW
 2 x 1,4 kW } 3,5 kW

 350 mbar (max) / 360 m³ / h (max)


 230 V / 50 Hz, 16 A

 3" (76 mm)

Transporthyelse | Transporteffekt | Output

 ~ 600 kg / h

 ≤ 40 cm

 300 - 400 kg / h

 ≤ 40 cm

Til cellulose og stenuld
For cellulose og steinull
Suitable for Cellulose and rock wool

